


FOLLOWING LIFT FOLLOW ROOF

Dimensions and installation requirements

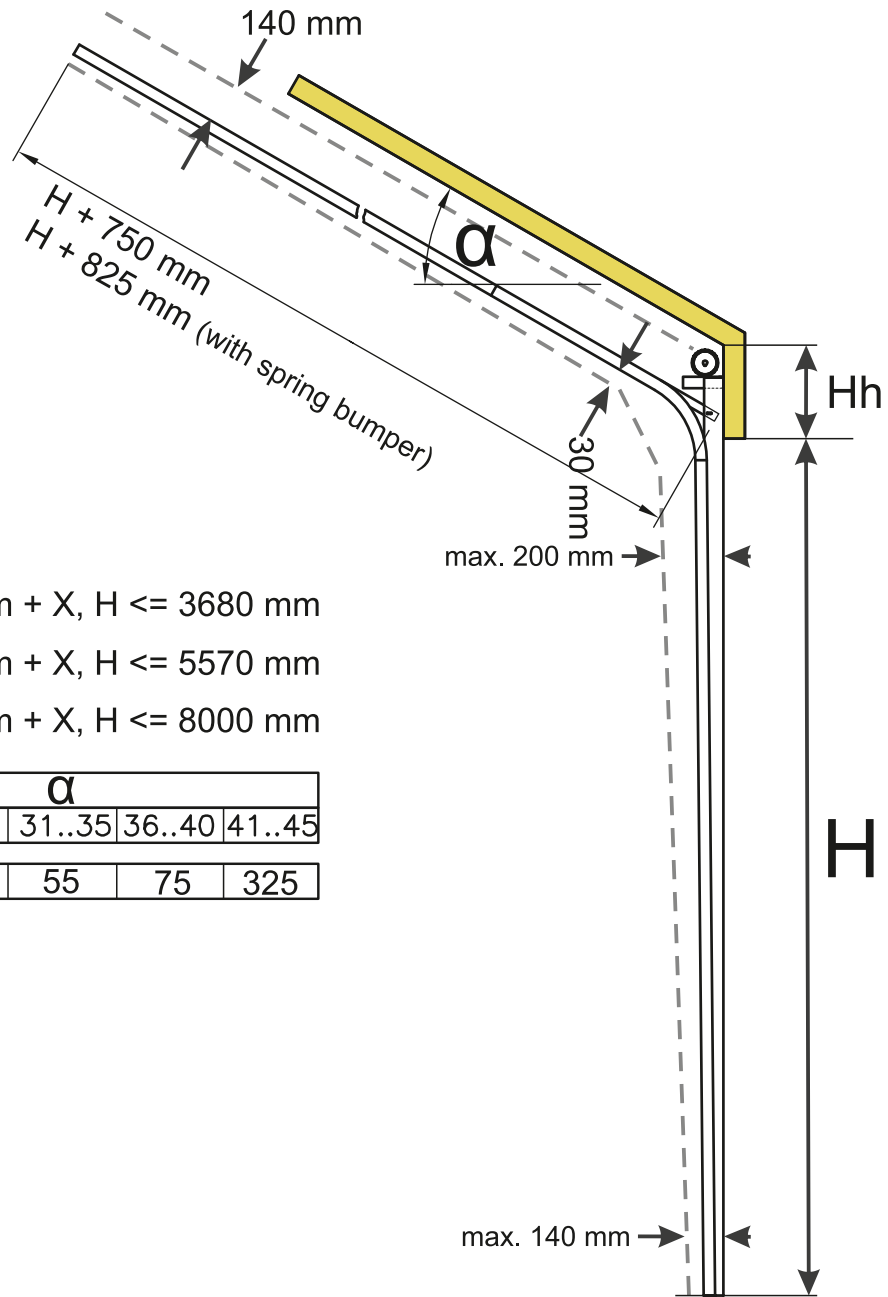

$Hh = 410 \text{ mm} + X, H \leq 3680 \text{ mm}$

$Hh = 430 \text{ mm} + X, H \leq 5570 \text{ mm}$

$Hh = 500 \text{ mm} + X, H \leq 8000 \text{ mm}$

α				
3..25	26..30	31..35	36..40	41..45

X=	0	35	55	75	325
----	---	----	----	----	-----

