


# RIPO Industrial doors

## LOW HEAD ROOM

### Dimensions and installation requirements

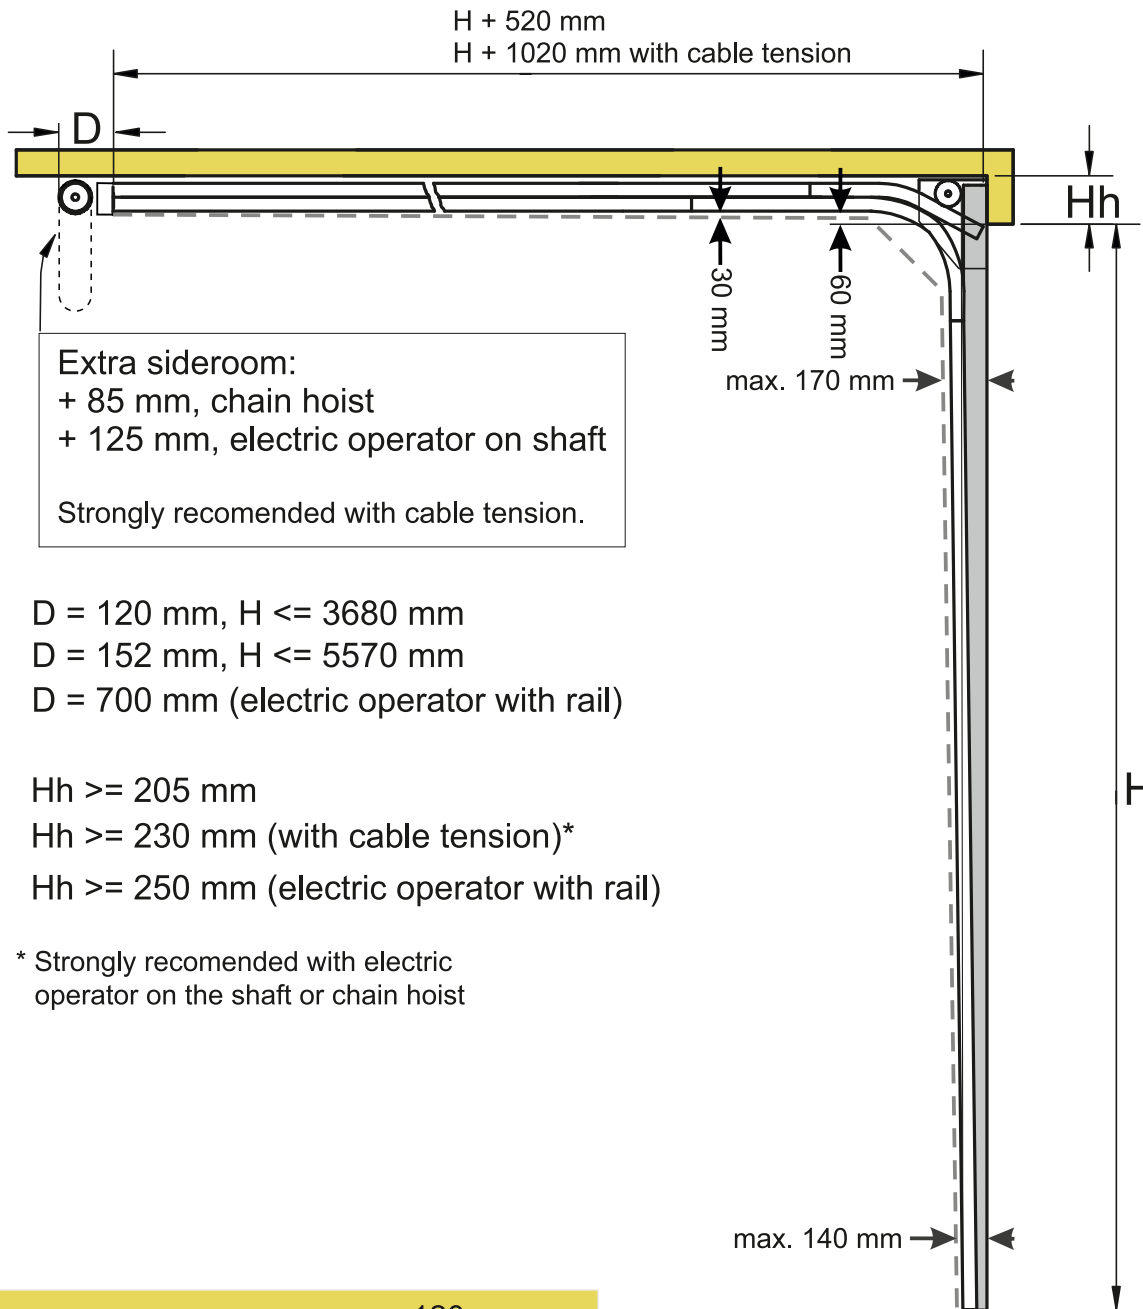

Extra sideroom:  
 + 85 mm, chain hoist  
 + 125 mm, electric operator on shaft  
 Strongly recommended with cable tension.

- $D = 120 \text{ mm}$ ,  $H \leq 3680 \text{ mm}$
- $D = 152 \text{ mm}$ ,  $H \leq 5570 \text{ mm}$
- $D = 700 \text{ mm}$  (electric operator with rail)

- $Hh \geq 205 \text{ mm}$
- $Hh \geq 230 \text{ mm}$  (with cable tension)\*
- $Hh \geq 250 \text{ mm}$  (electric operator with rail)

\* Strongly recommended with electric operator on the shaft or chain hoist

